




DEL1125



DEL1125 INSTALLATION



Dimensions needed to install strike
Unit:mm

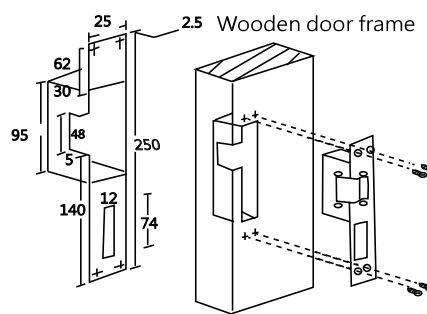

General Feature

- ★ Dimensions: 250L x 25W x 31D mm
- ★ DEL1125/DEL1125F Fail Secure/Fail Safe
- ★ Current: 600mA/12VDC, (F)280mA/12VDC
300mA/24VDC, (F)140mA/24VDC
- ★ Face Plates:
- ★ DEL1125(F) - Steel (Painted)
- ★ SDEL1125(F) - Stainless steel

Keep Depth: 6mm

Metal or Aluminium door frame



2.5 Wooden door frame

DEL1125-(J.A.B)



J: Adjustable Jaw
A: Day Locking Lever
B: Impulse Switch

DEL1125 INSTALLATION

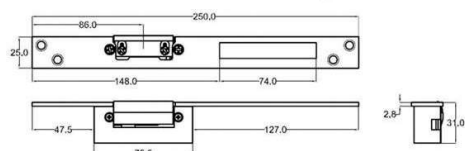

General Feature

- ★ DEL1125J - Steel face plate adjustable symmetrical strike fail secure 12VDC
- ★ DEL1125JA - Stainless steel face plate adjustable symmetrical strike, day locking lever, fail secure 12VDC
- ★ DEL1125JAB-24 - Steel face plate adjustable symmetrical strike, day locking lever, impulse switch, fail secure 24VDC
- ★ Fail safe type: DEL1125F/SDEL1125JF only
- ★ Dimensions: 250L x 25W x 31Hmm
- ★ Voltage: 12VDC(default) or 24VDC
- ★ Current draw:
 - fail secure - 600mA/12VDC
 - fail secure - 300mA/24VDC(specified on order)
 - fail safe - 280mA/12VDC
 - fail safe - 140mA/24VDC(specified on order)
- ★ Face plate:
 - steel/stainless steel - 250L x 25W x 2.8T mm
- ★ Built-in voltage spike suppressor
- ★ Keeper depth: 6mm
- ★ Applicable door latch: 9mm
- ★ CE approved