

DUAL MODE


DEL124SLD



DEL124SLD-EX




DEL124SLD DIMENSION

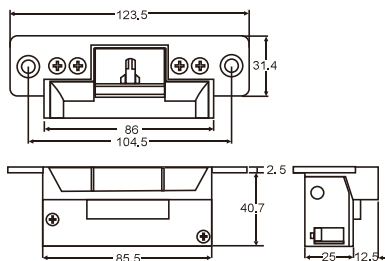

General Feature

- ★ **DIMENSIONS:**
DEL124SLD: 123.5Lx31.4Wx40.7Dmm
Keeper Depth: 12.7mm
DEL124SLD-EX: 165Lx31Wx40.2Dmm
Keeper Depth: 12.7mm
- ★ **FACE PLATE DIMENSIONS:**
DEL124SLD: 123.5Lx31.4Wx2.5Dmm
DEL124SLD-EX: 165Lx31Wx2Tmm
- ★ **Modes:**
DEL124SLD Aluminum face plate fail secure w/door, lock monitor 12VDC
DEL124SLD-EX Stainless steel face plate fail secure w/door, lock monitor 12VDC
- ★ **Current:** 260mA/12VDC or 150mA/24VDC (specify on order)
- ★ **Fail Safe/Fail Secure:** Site convertible from one mode to the other (Fail secure default, unless specify on order)

DEL124SLD-EX DIMENSION

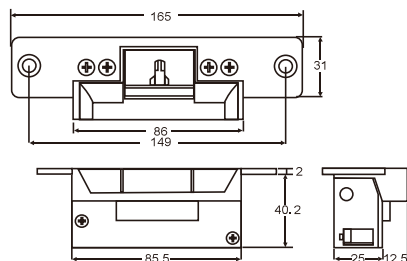


DUAL MODE

DEL304SLD



DEL304SLD DIMENSION

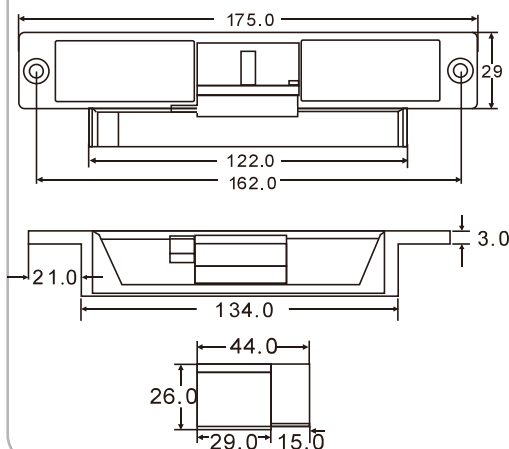

General Feature

- ★ **DIMENSIONS:**
DEL304SLD: 175Lx29Wx26Dmm
Keeper Depth: 10.8mm
Face Plate: 175Lx29Wx3Tmm
- ★ **Mode:** Stainless steel face plate fail secure w/door, lock sensor
- ★ **Current:**
280mA/12VDC or 140mA/24VDC (specify on order)
170mA/12VAC or 85mA/24VAC (specify on order)
- ★ **Door Latch:** 10.8mm
- ★ **Site convertible** from one mode to the other (Fail secure default, unless specify on order)

INSTALLATION

