

## 1500LBS MAGNETIC LOCK



### DSL6150




### DSL6250




### Application


- Horizontal or vertical installation



Anti-dismounting and Anti-falling function

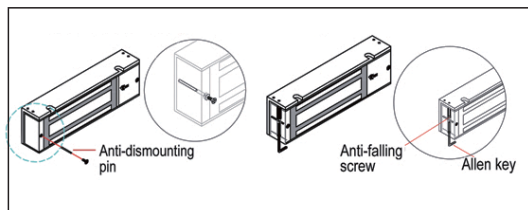

Special mounting plate for fast, effort-saving and simple installation

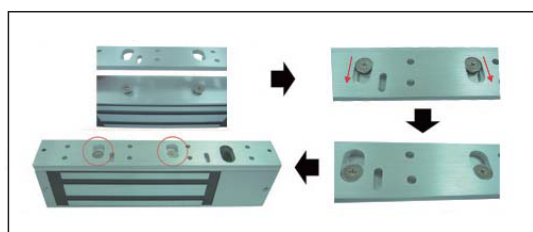

### General Feature

#### ◆ DIMENSIONS:

Magnet(DSL6150): 286mmLx73mmWx40mmD

Magnet(DSL6250): 572mmLx73mmWx40mmD

#### ◆ Armature Plate: 185mmLx61mmWx16mmT

#### ◆ Dual Voltage: 12/24VDC

#### ◆ Current Draw: 600mA/12VDC, 300mA/24VDC

#### ◆ Holding Force: about 1500LBS

#### ◆ Built-in Voltage Spike Suppressor

#### ◆ With Bi-color LED

#### ◆ Anodized aluminum housing

#### ◆ Adjustable mounting plate for easy and appropriate installation

#### ◆ Special finish : Zinc (on the magnet & armature plate)

#### ◆ No residual magnetism

#### ◆ Timer: 0-90 seconds

#### ◆ Option:

DSL6150: Basic type

DSL6150H: Lock Status Sensor

DSL6150HT: Timer, Lock Status Sensor

DSL6150HT-DS: Timer, Lock Status Sensor and Door Status Sensor

DSL6250: Basic type


DSL6250H: Lock Status Sensor

DSL6250HT: Timer, Lock Status Sensor

DSL6250HT-DS: Timer, Lock Status Sensor and Door Status Sensor


### Brackets

#### DOOR STATUS SENSOR




Door opened or door closed status.


#### RELOCK TIME DELAY



#### Lock Status Sensor



### EA342D



### EA350

