




BRACKET FOR 300LBS

EA302



ARMATURE PLATE HOUSING

- ★ DIMENSIONS:
145mmLx50mmWx15mmD
- ★ Aluminum Painted Finish
- ★ Weight: 100G




DU211



U BRACKET

- ★ DIMENSIONS:
130mmLx62mmWx33mmD
- ★ ANODIZED Finish
- ★ Suitable for Glass Door
- ★ Max 12mm glass door thickness.
- ★ Weight: 550G




EA300 EA300A (180mm)



L & Z BRACKET

- ★ DIMENSIONS:
L: 166/180mmLx42mmWx30mmD
Z: 166mmLx38mmWx38mmD
- ★ ANODIZED Finish
- ★ Weight: 600G




EA304



L BRACKET

- ★ DIMENSIONS:
166mmLx42mmWx30mmD
- ★ ANODIZED FINISH
- ★ Weight: 75G




BRACKET FOR 600LBS

EA322



ARMATURE PLATE HOUSING

- ★ DIMENSIONS:
200mmLx55mmWx15mmD
- ★ Aluminum Painted Finish
- ★ Weight: 240G




DU213



U BRACKET

- ★ DIMENSIONS:
185mmLx62mmWx33.6mmD
- ★ ANODIZED Finish
- ★ Suitable for Glass Door
- ★ Max 12mm glass door thickness.
- ★ Weight: 650G




EA320



L & Z BRACKET

- ★ DIMENSIONS:
L: 250mmLx48mmWx30mmD
Z: 185mmLx50mmWx50mmD
- ★ ANODIZED Finish
- ★ Weight: 780G




EA314



L BRACKET

- ★ DIMENSIONS:
250mmLx48mmWx30mmD
- ★ ANODIZED FINISH
- ★ Weight: 130G




BRACKET FOR 1200LBS

EA342



ARMATURE PLATE HOUSING

- ★ DIMENSIONS:
200mmLx76mmWx15mmD
- ★ Aluminum Painted Finish




DU213



U BRACKET

- ★ DIMENSIONS:
185mmLx62mmWx33.6mmD
- ★ ANODIZED Finish
- ★ Suitable for Glass Door
- ★ Max 12mm glass door thickness.




EA340



L & Z BRACKET

- ★ DIMENSIONS:
L:266mmLx76mmWx38mmD
Z:185mmLx63.8mmWx63.8mmD
- ★ ANODIZED Finish




EA324



L BRACKET

- ★ DIMENSIONS:
266mmLx76mmWx38mmD
- ★ ANODIZED FINISH




BRACKET FOR GATE LOCK

DU213



U BRACKET

- DIMENSIONS:
185mmLx62mmWx33.6mmD
- ANODIZED Finish
- Suitable for Glass Door
- Max 12mm glass door thickness.




EA321

(for 600lbs)



L & Z BRACKET

- ★ DIMENSIONS:
L:200mmLx48mmWx30mmD
Z:185mmLx50mmWx50mmD
- ★ ANODIZED FINISH




EA341

(for 1200lbs)



L & Z BRACKET

- ★ DIMENSIONS:
L:200mmLx76mmWx38mmD
Z:185mmLx63.8mmWx63.8mmD
- ANODIZED Finish




EA343



ANGLE BRACKET

- ★ DIMENSIONS:
266mmLx38mmWx25mmD
- ★ ANODIZED FINISH





EA344 EA345



FILLER BAR

- ★ DIMENSIONS:
EA344:266mmLx19mmWx16mmD
EA345:266mmLx19mmWx12.7mmD
- ★ ANODIZED FINISH




Shear Lock




HS01-HT 1200 LBS

Specifications

Voltage : 12V/24V
 Current draw : 1.6A/12V, 0.9A/24V
 Holding current : 0.4A/12V, 0.2A/24V
 Signal : Bond sensor, Timer.

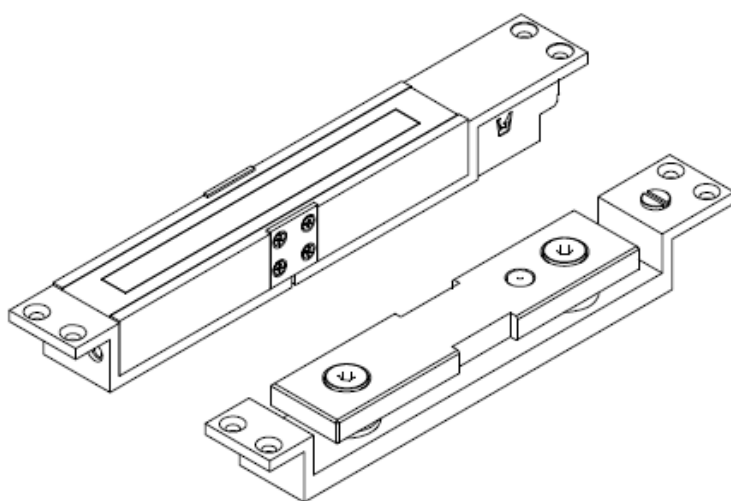

Dimensions

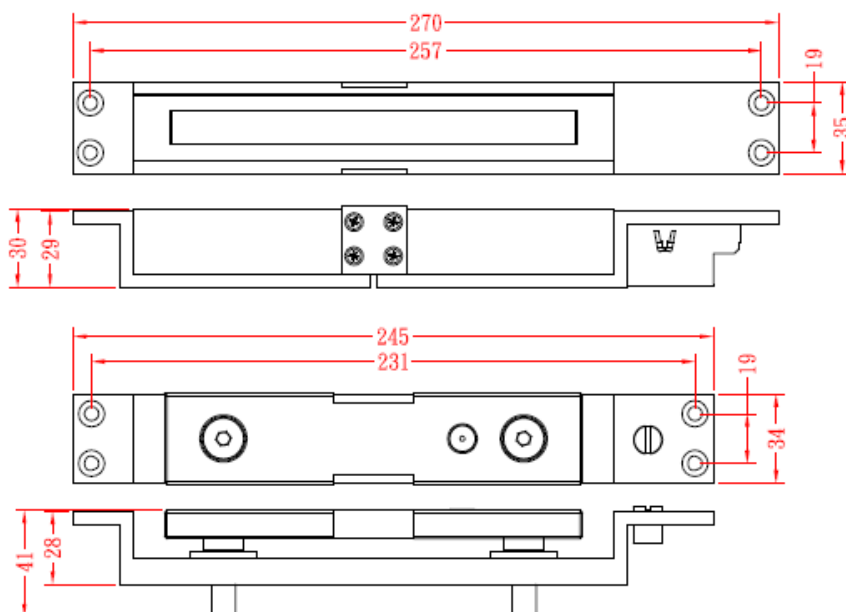

Shear Lock




HS05-H 1200 LBS

Specifications


Voltage : 12V/24V

Current draw : 0.45A/12V, 0.23A/24V

Signal : Bond sensor

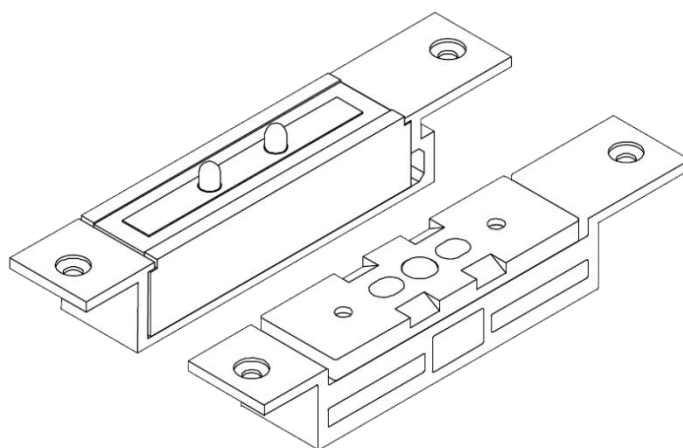

Dimensions

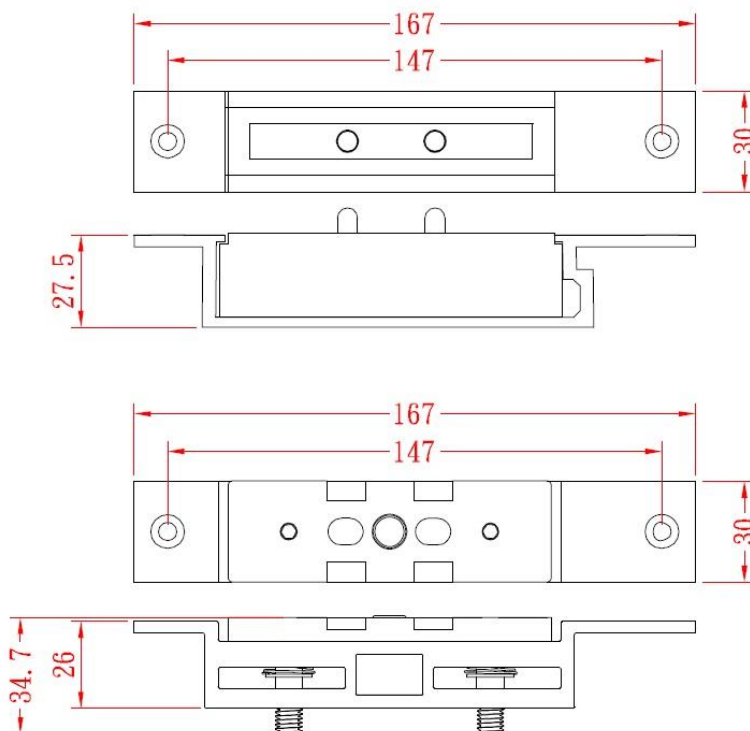


Shear Lock




HS02-HT 1400-1500 LBS

Specifications


Voltage : 12V/24V
 Current draw : 1.80A/12V, 0.90A/24V
 Holding current : 0.38A/12V, 0.19A/24V
 Signal : Bond sensor, Timer.

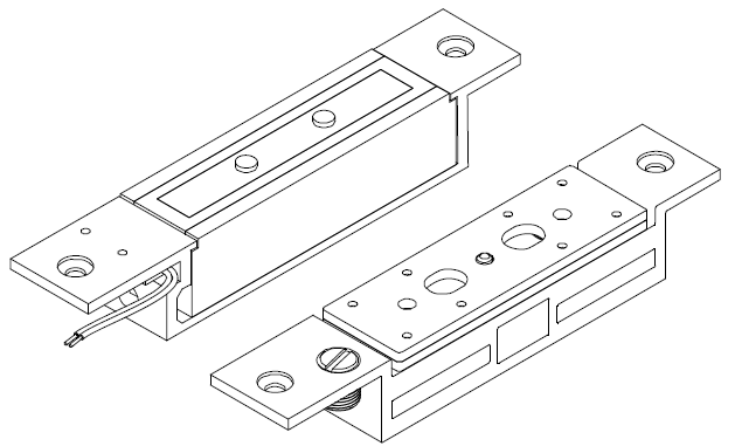

Dimensions

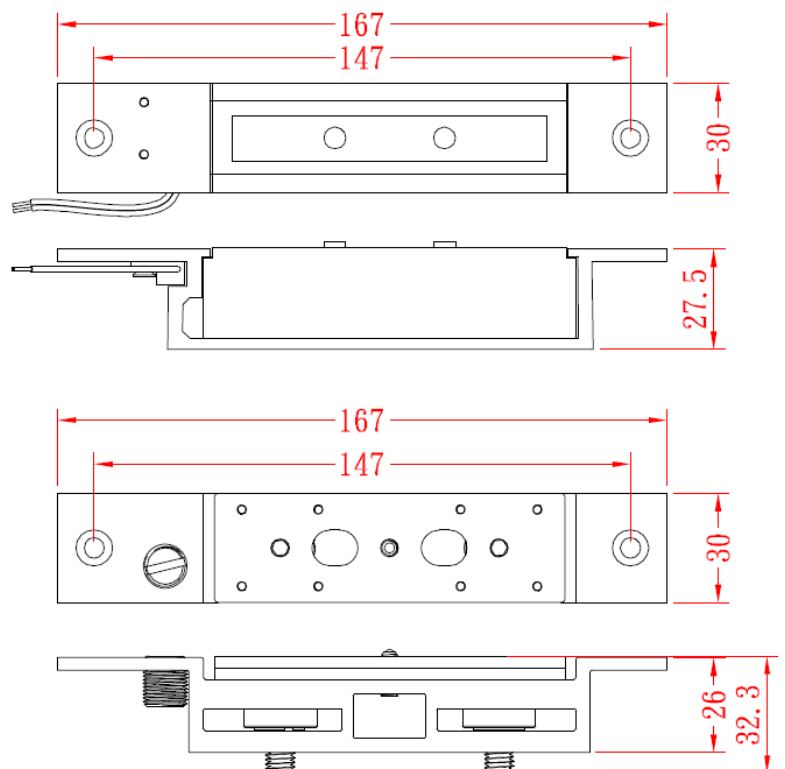


Shear Lock

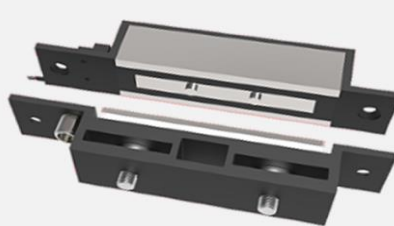


HS03-HT 2200 LBS

Specifications


Voltage : 12V/24V
 Current draw : 1.85A/12V, 1.10A/24V
 Holding current : 0.45A/12V, 0.25A/24V
 Signal : Bond sensor, Timer.

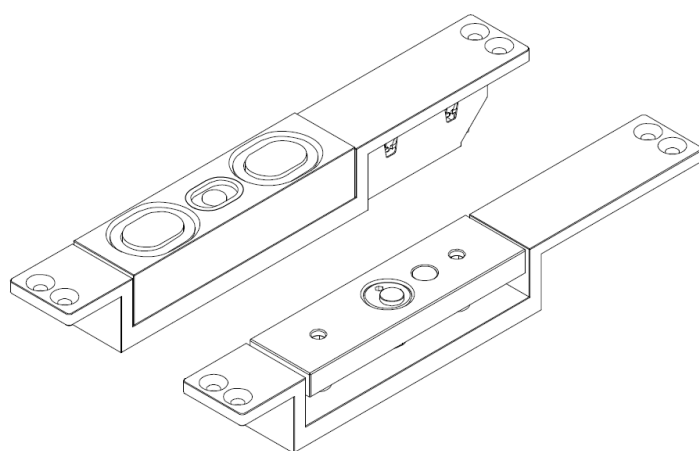

Dimensions

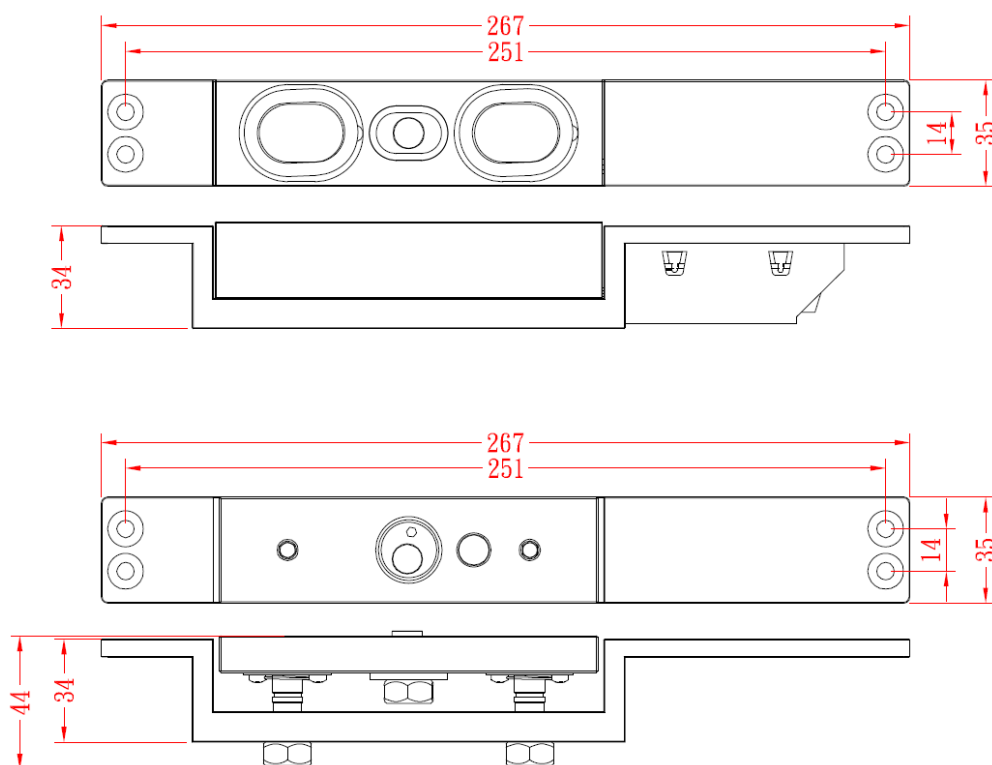


Shear Lock

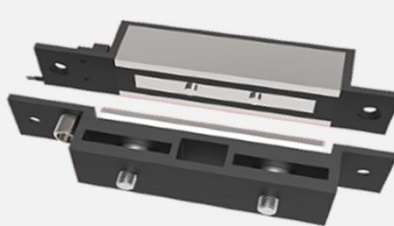

HS04-HT 2200 LBS

Specifications

Voltage : 12V/24V
 Current draw : 1.85A/12V, 1.10A/24V
 Holding current : 0.45A/12V, 0.25A/24V
 Signal : Bond sensor, Timer.

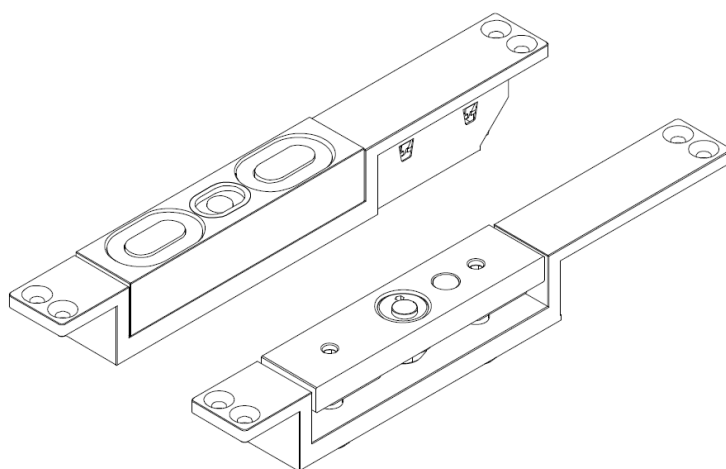

Dimensions

